


DOCUMAX 3300 Series

Look For Lasting Performance

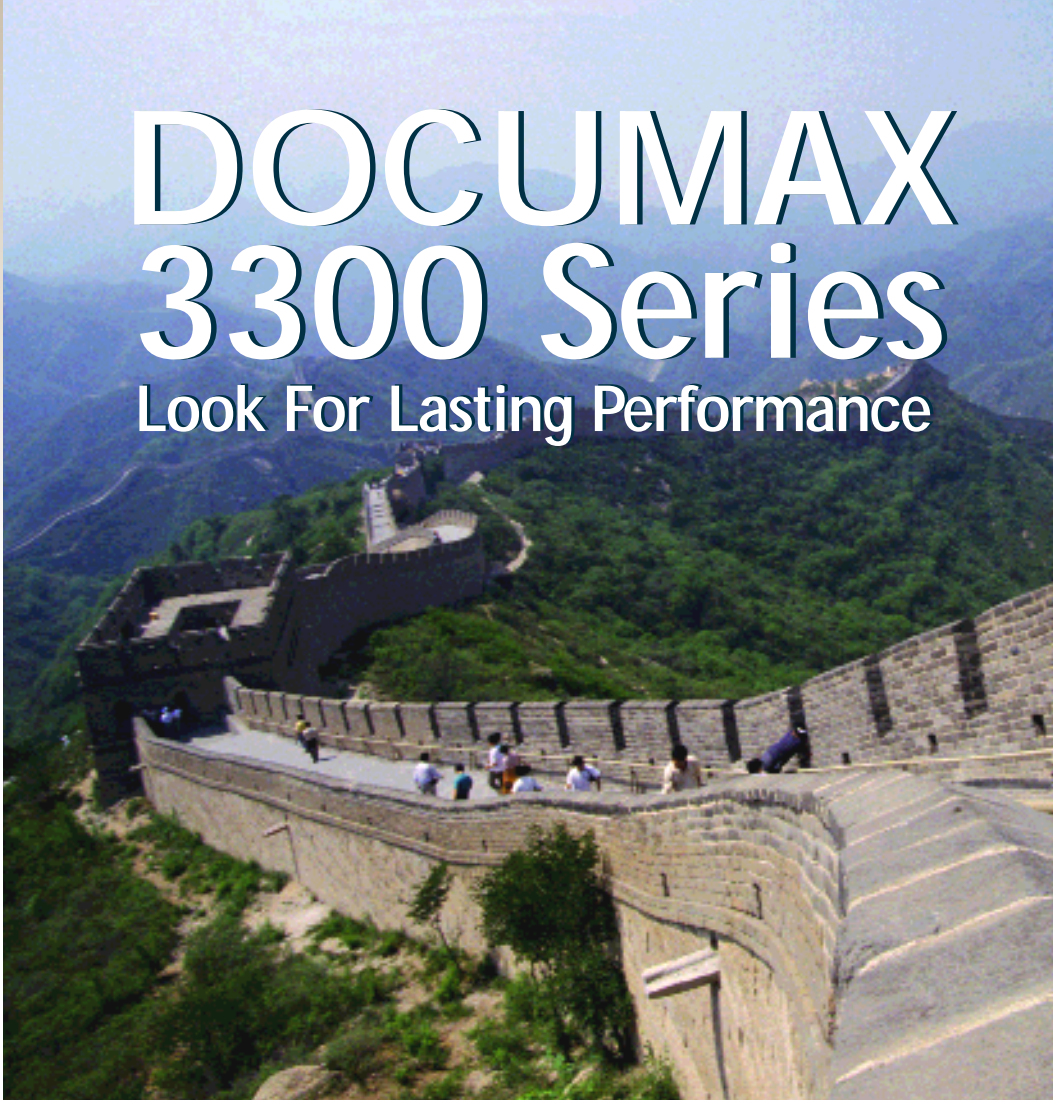

Documax 3300 Series – The Multi-Part Form Specialist

Expect outstanding performance on heavy forms from this printer. It's the industry standard for reliability and ease of use.

Field-Proven Reliability


- Straight paper path feeds forms efficiently to eliminate bunching and jamming
- Superior engineering for years of use

Effective on the Job

- Prints virtually all forms to 9 parts
- Multiple emulations ensure code compatibility with applications software

Cost Saving and Efficient

- Zero tear-off design prints every form to eliminate waste
- Compact footprint requires less space
- One-touch operation increases ease of use
- Dual tractor model automatically switches between two different forms

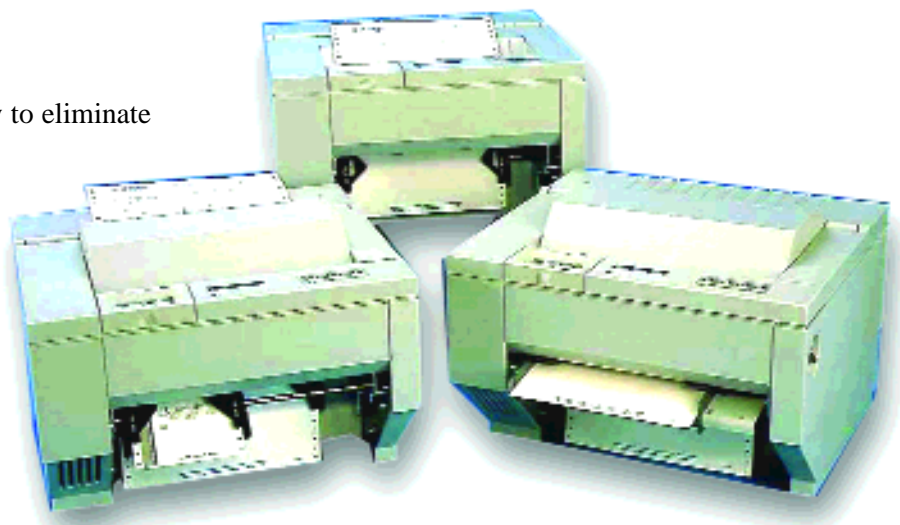

Documax 3300 Dot Matrix Printers Feature:




- Robust, reliable printing
- Easy selection of functions with one-touch operation using four pre-configured settings
- Automatic adjustment to form thickness and selection of first print line
- Quick feature access via LCD panel and 8- function keypad
- Minimal ribbon changes provided by high-volume cartridge ribbon (7-10 million character average)
- Zero tear-off ensures efficient use of every form
- Ability to use multiple forms and papers, including cut sheets, with single or dual-tractor feed and tractor-friction models
- Equipped for demand document printing as a standard feature

PRINTER SPECIFICATIONS INCLUDE:


Models*	3300	Single Tractor V-Throat
	3301	Single Tractor with Top Pinch Rollers
	3302	Dual Tractor with Top Pinch Rollers
	3303	Tractor and Friction Feed with Top Pinch Rollers
Speed **	DP Mode	333 cps
	Draft Mode	250 cps
	NLQ Mode	75 cps
Pitches (cpi)	DP/Draft	10, 12, 13.2, 15, 16, 16.5, 17.16, 18, 20
	NLQ	10, 12
Graphics	Horizontal	60, 72, 80, 90, 120, 240 dpi
	Vertical	72, 216 dpi
Print Width	8.8"	88 Columns at 10 cpi
Printhead	9-Wire with 300M Character Life	
Operator Panel	Display Features	1 x 16 LCD
		Park and Load Modes
		Demand Document/O Tear-off
		4 User Defined Profiles Quick Access Menu
Paper Feed	Model 3300/3301:	3.5" to 10.625" 9 Parts (.028") Paper Slew – 15 ips
	Model 3302:	Path #1 - 3.5" to 10.625" Path #2 - 3.5" to 10.5" 9 Parts (.028") Paper Slew – 15 ips
	Model 3303:	Path #1 - 3.5" to 10.625" Paper Slew – 15 ips Path #2 - 3.5" to 10.625" (cut sheet) 9 Parts (.028") Paper Slew – 10 ips
Warranty	One Year Parts and Labor, Return to Depot	

Bar Codes	DGCL: Code 39, I 2 of 5, EAN 8/13, Codabar, Postnet, Code 128-B/C, UPC-A, Line/Box Drawing, Reverse Text, Expanded Characters, OCR A & B, (Optional Code V/IGP)
Buffer	3K (Expandable to 128K Option)
Emulations	Epson FX, IBM Proprinter, DEC LA 120, DS180
Optional Emulations	Genicom ANSI 3.64
	PCL
	DG6425
	TI885
	QMS Code V/IGP
Interface	Serial RS-232/422
	Baud Rates 110 to 19.2K
	Handshaking – DTR, Xon/Xoff, ETX/ACK, ENG/ACK
	Centronics Parallel
	Integrated Ethernet, 10 BaseT Multi-Protocol
	IBM Twinax/Coax External Adaptor
Physical/Electrical	Size – 17" x 15.5" x 11.2" (W x D x H)
	Weight – 45 lbs. (53 lbs. Boxed)
	Power – 115/230 VAC, 50/60 Hz
	Certification – UL 1950, CSA C22.2 No. 950, TUV GS, FCC class A, CE Mark
Options	Printer Stand
	Security Cabinet

* Paper Feed Paths




Single Tractor V-Throat



Dual Tractor with Top Pinch Rollers

A. Path #1
B. Path#2



Tractor Friction with Top Pinch Rollers for cut sheet and tractor fed document printing

A. Path #1
B. Path #2

** Speed rated at 12cpi

All products or brand names are registered trademarks of their respective holders. Specifications subject to change.

Some models and features may not be currently available.

Specifications subject to change without prior notice.

Part No. 104491 Rev. K



Corporate Headquarters
4765 Calle Quetzal, Camarillo, CA 93012
(805) 388-5799 PH
(805) 484-5282 FX

Charlotte Operation
4216 Stuart Andrew Blvd., Charlotte, NC 28217
(704) 523-8500 PH
(704) 525-6104 FX

AMT Datasouth International
Unit B, Pinnacle 15, Gowerton Rd, Brackmills
Northampton, NN4 7BW, England
+44 1604 763394 PH
+44 1604 760661 FX

<http://www.amtdatasouth.com>