

JOURNEY

Take A Journey That's First Class At Coach Fare



The New Journey Desktop ATB2 Printer

Affordable

- A New Price Point for Full Featured ATB2 Printers
- Low Cost of Ownership

Adaptable


- Space-Saving Size
- Ideally Suited for Travel Agencies, STP, and CTOs
- Complements Electronic Ticketing
- Standard Display Languages include English, German, French, Italian, Spanish, Portuguese

Easy to Use

- 12 Key Color Coded Keypad
- 2 x 24 Back Lit Display
- Effortless Stock Loading and Easily Accessible Paper Path
- Cleaning Mode
- Floppy Disk and Flash Memory for Easy Software Updates

High Performance

- Rugged Durability
- Paper Path Provides Superior Reliability & Low Maintenance
- Sharp, Legible Print

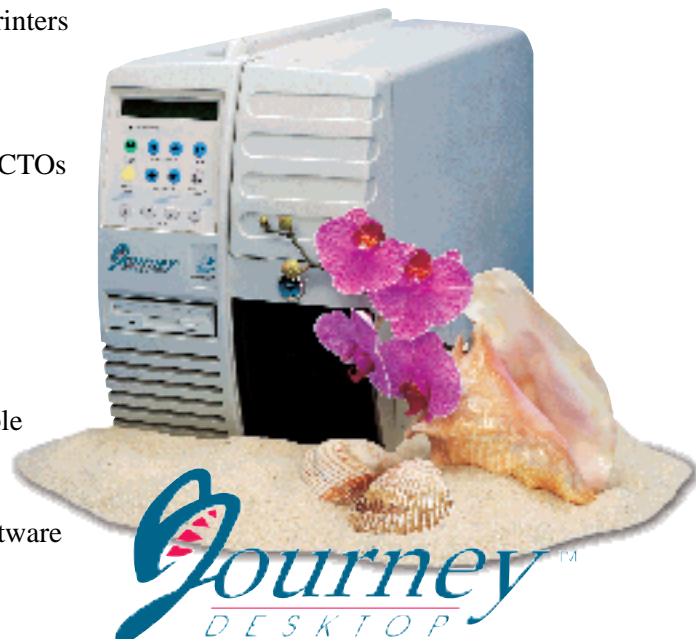

Now you don't have to pay a big ticket price
for a first class desktop ticket printer.

AMT Datasouth's Journey Desktop ATB2 Direct Thermal Printer Features:



PRINTER SPECIFICATIONS INCLUDE:

Sharp Direct Thermal Print Technology

- 203 DPI
- Adjustable Darkness Setting
- Simple Printhead Cleaning and Replacement

Legible OCR B, Letter Gothic 5, 10, 17 cpi, and Bold Fonts

- Full Font Scaling and Rotation

High Performance Print Speed Producing 7 to 10 Coupons Per Minute

Accessible IATA RP 1722 Resolution 722e Magnetics

- 4 Tracks at 210 bpi
- Read, Write, Write Verify
- SCN Read
- Modular Design for Service

Uncomplicated Document Handling

- Burst Fan-Fold Stock
- Key Lock Input Bin Capacity 500 Coupons
- Key Lock Output Bin Capacity 400 Coupons
- Easily Accessible Paper Path

Flexible Communications System

- Host/Modem Port: RS-232C
- Itinerary Printer Port: RS-232C
- Baud Rates: 1200, 2400, 4800, 9600, 19200, 38400, 57600
- Full Hardware and Software Handshaking
- Modem Control Signals
- Protocols Compatible with any Host

Compatible AEA '94 PECTAB Programming

- Minimum of 8 PECTABS in Flash Memory

Operating Environment

- Operating Temperature: 40°F to 104°F (5°C to 40°C)
- Storage Temperature: -4°F to 140°F (-20°C to 60°C)
- ESD: Contact ±4kV, Air ±8kV

Compliance

- Safety: UL 1950, CSA 950, TUV GS Mark, CE Mark
- Emissions: FCC Class A, CSA Standard C 108.8, CE Mark

Power

- Auto Voltage Select
- 97v to 264v, 47Hz to 63Hz

Dimensions

- 24.3 x 10.5 x 14.8 (L x W x H in.)

Weight

- 45 Pounds

Options

- 1MB RAM
- Printer Stand

All products or brand names are registered trademarks of their respective holders.
Specifications subject to change.
Some models and features may not be currently available.

Specifications subject to change without prior notice.
Part No. 107074 Rev. B

AMT Datasouth

Corporate Headquarters
4765 Calle Quetzal, Camarillo, CA 93012
(805) 388-5799 PH
(805) 484-5282 FX

Charlotte Operation
4216 Stuart Andrew Blvd., Charlotte, NC 28217
(704) 523-8500 PH
(704) 525-6104 FX

AMT Datasouth International
Unit B, Pinnacle 15, Gowerton Rd, Bracknills
Northampton, NN4 7BW, England
+44 1604 763394 PH
+44 1604 760661 FX

<http://www.amtdatasouth.com>